


# Temporal Analyser

OPTIScope-SA

VESA 2.0  
FPDM compliant

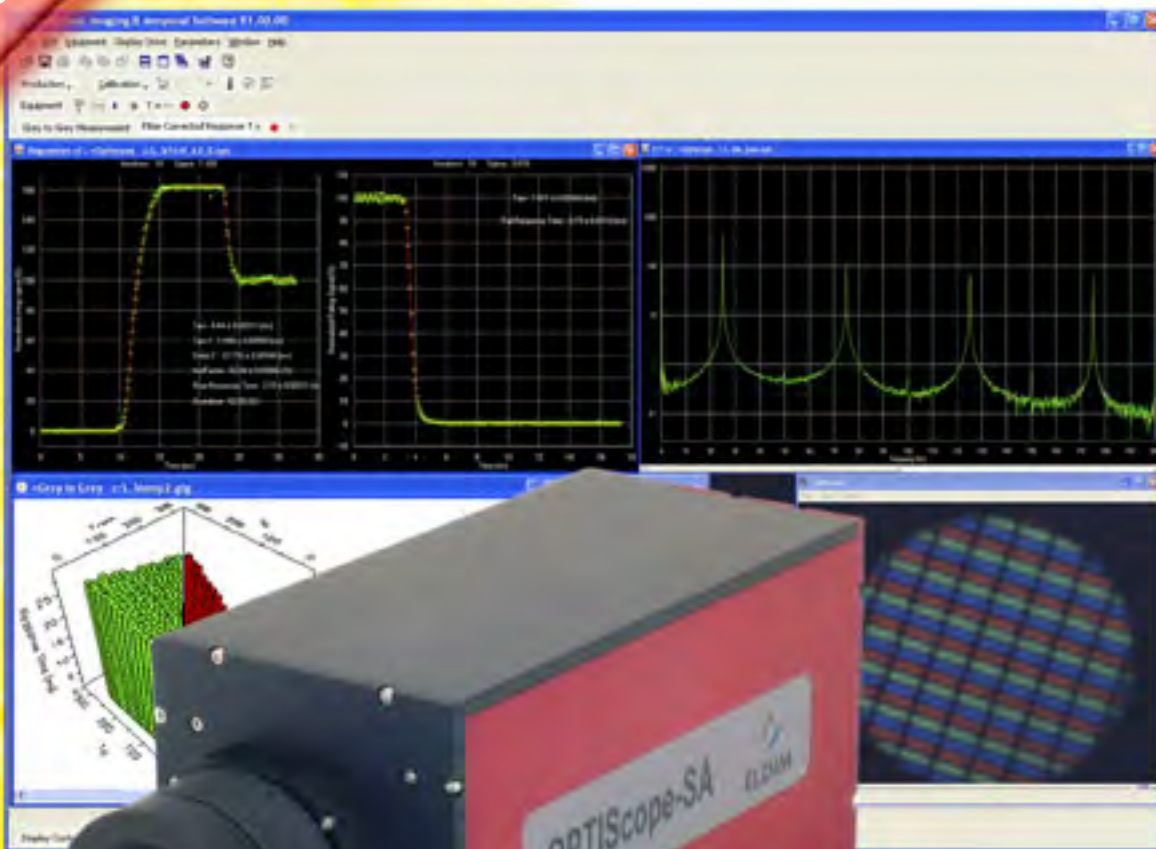

**Response time**

**Luminance**

**Flicker**

**Gamma curves**

**Overdrive & Underdrive**

宇宏企業股份有限公司

台北：三重區重新路五段 609巷 16號 5樓之7

TEL:02-22782269 FAX:02-22782059

新竹：新竹縣竹北市台元 26 號 4 樓之 10

TEL:03-552-6779 FAX:03-552-6739

<http://www.radiotek.com.tw/>

E-mail: salesmag1@radiotek.com.tw

## Systems for full analysis of display temporal behavior

### OPTIScope-SA's benefits

**Accurate measurements** due to direct optical collection, short sampling step and excellent signal over noise ratio

**Absolute luminance measurements** for gamma curves and iso-step luminance temporal analysis

**Easy & simple acquisition area positioning** with direct view CMOS visualisation

**User friendly software** for automation of measurement and analysis with advanced algorithms for new driving technologies


**Full solution** with ELDIM FPDDrive and FPDlite display controller or other systems

ADVANCED TEMPORAL ANALYSER by  ELDIM


**Description**



**OPTIScope-SA** look like a conventional camera but includes all the hardware needed for temporal and luminance measurements. An imaging objective collects the light in a angular aperture of  $\pm 1^\circ$  following **VESA standard**. An image of the target is obtained with a color CMOS sensor for easy alignment of the system. Part of the light goes on a photomultiplier across a photo peak filter. An additional system including calibrated photodiode and LED illumination allows self calibration for accurate luminance measurements. The **OPTIScope-SA** can be used at various distances from the display down to  $\sim 30\text{cm}$ . It is totally equivalent to PM + digital oscilloscope.

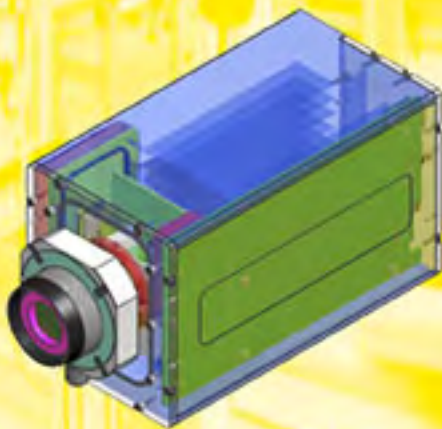


**Side view**

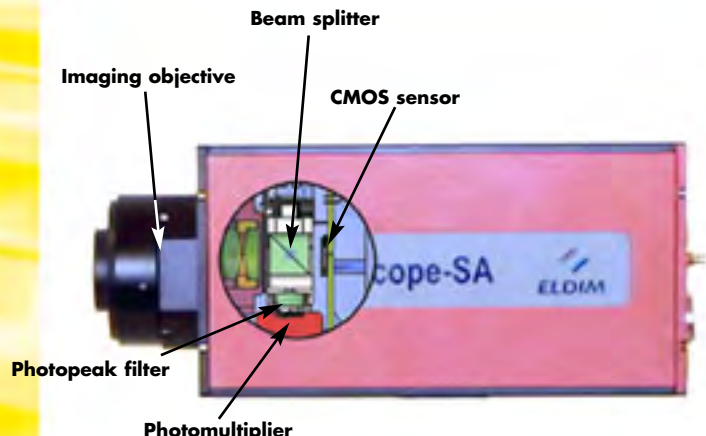


**Cross section**

The electronics includes a 16bits analog to digital converter and on board 4M memory. USB 2.0 connection with PC allows real time and unlimited acquisitions with a sampling step between 5 and  $20\mu\text{s}$ . The CMOS color sensor offers a 1M pixels resolution for alignment purpose. Dark noise is automatically corrected using a shutter.

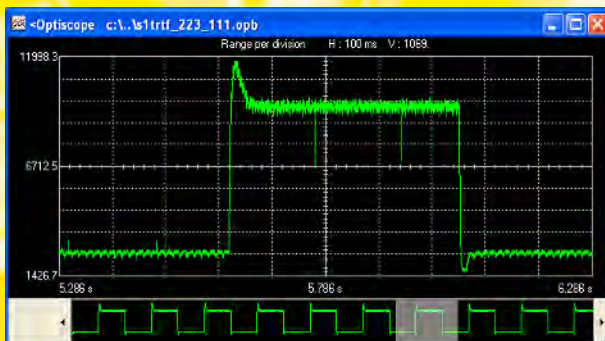

*Example of temporal response of an overdriven LCD between two intermediate grey levels.*

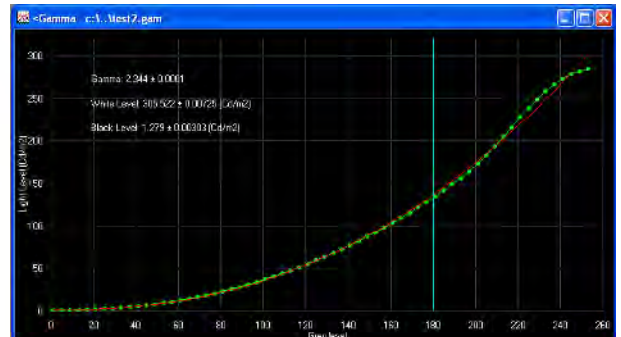

*Gamma curve of a LCD display*


The measurement software can control the display for automated gamma and grey to grey response time measurements. Coupled with the **ELDIM FPDDrive** or **FPDLite** equipment, it offers a full solution for automated analysis of the temporal behavior of displays.

## Data analysis


**OPTIScope-SA** comes with a complete and sophisticated solution for measurement analysis and response time extraction. VESA procedure, low pass and stop band filtering can be applied. Response time compensation due to low pass filtering is also available. The software can also apply direct regression with different mathematical model. This is useful to extract more precisely response time values and additional parameters related to the shape of the temporal behaviors (overdrive, underdrive, time delay...).



Direct regression of theoretical behaviors on measured profiles present many advantages. The response time is more precisely determined with also an estimation of the error. More parameters can be extracted like over and under drive amplitude, time delay for overdrive application... and custom behaviors can be treated.

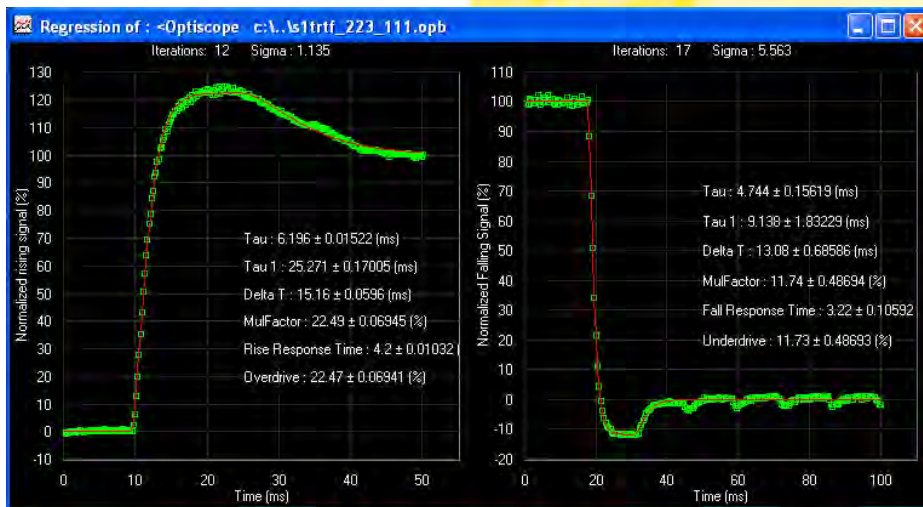


Example of regression on the rising and falling profiles for an overdriven LCD

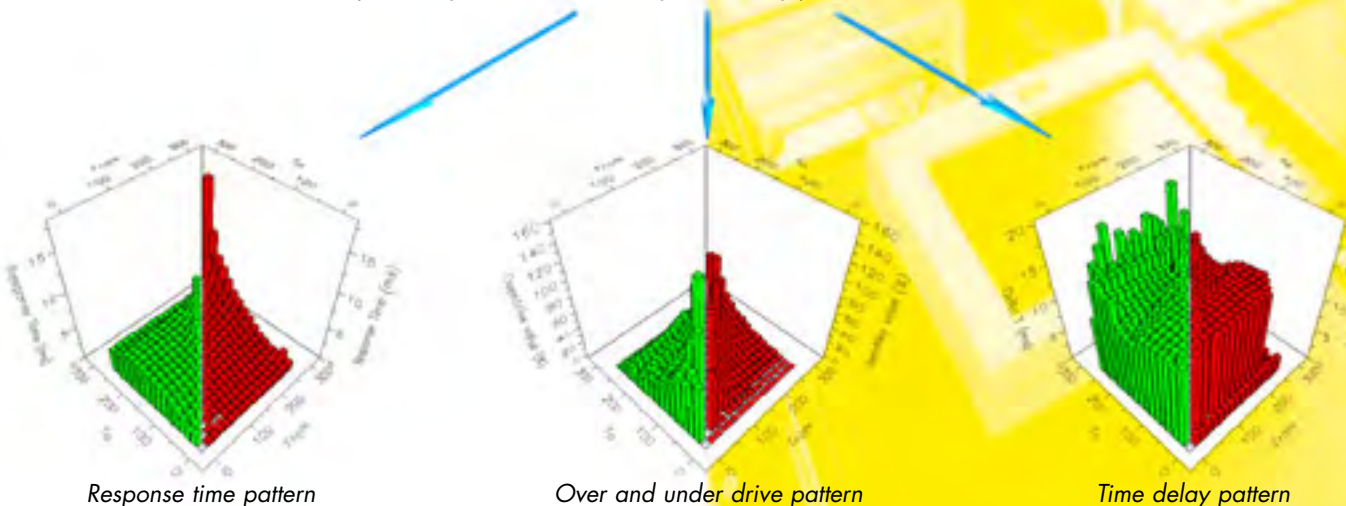



## Software solution

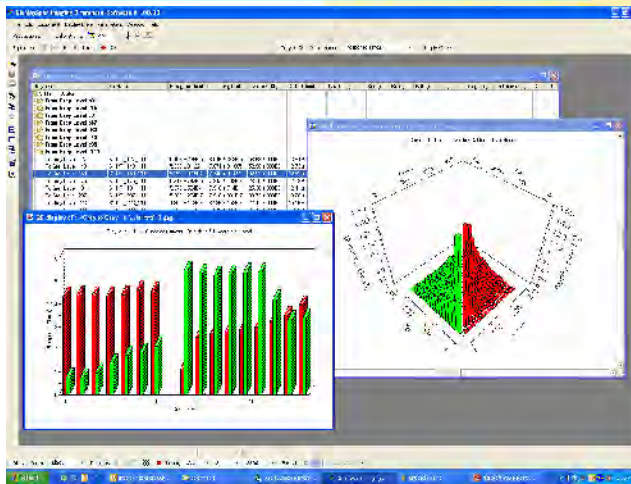

Automated measurement & analysis software

## Specifications

<b>Hardware features</b>	Autorange or fixed range for PM Auto-zero and noise correction by shutter Imaging by a 1024x1280 color CMOS sensor Optical collection with $\pm 1^\circ$ angular aperture Trigger TTL input Working distance 30cm - 100cm (17mm spot diameter at 50cm)
<b>Digitizer</b>	16 bits + digital filtering and sub-sampling Sampling interval 5-20 $\mu$ s (typical 16 $\mu$ s) 4M samples on board memory Unlimited acquisition time through USB 2.0 connection
<b>Performances</b>	Luminance accuracy at $\pm 3\%$ around A Response time accuracy $< 0.5\%$ and repeatability $< 0.2\%$ (with LED test module)
<b>Software features</b>	Time and frequency domain display mode Flicker analysis Absolute gamma measurement & analysis Low pass and band stop signal filtering Response time analysis (direct, VESA, corrected low pass, regression) Full regression on temporal behaviors (simple, overdriven and under driven models) Fully automated grey level measurement (iso grey level steps or iso luminance steps) Display control trough <b>FPDDrive</b> , <b>FPDLite</b> or other systems Custom display control possible using DLL connection
<b>Voltage &amp; power</b>	110/200V, 15W
<b>Size &amp; weight</b>	Weight: 2.5kg Size (L x W x H): 225mm x 90mm x 100mm



**ELECTRONICS FOR DISPLAYS  
AND IMAGING DEVICES**



**宇宏企業股份有限公司**

台北：三重區重新路五段 609巷 16號 5樓之7  
TEL:02-22782269 FAX:02-22782059

新竹：新竹縣竹北市台元 26 號 4 樓之 10  
TEL:03-552-6779 FAX:03-552-6739

<http://www.radiotek.com.tw/>

E-mail : [salesmag1@radiotek.com.tw](mailto:salesmag1@radiotek.com.tw)

ELDIM - 14200 Hérouville Saint Clair - France  
Phone : + 33 2 31 94 76 00 - Fax : + 33 2 31 94 09 50  
E-Mail : [eldim@eldim.fr](mailto:eldim@eldim.fr) • Internet address : <http://www.eldim.fr>

