

# GOSSEN METRAWATT



# SECULIFE® DF 系列



DF PRO



DF BASE

# SECULIFE DF 系列是用於最新-去顫器的智慧測試儀器

它測量放電能量並提供有關去顫器脈衝的信息。該測試儀適 用於單相,雙相和脈衝波形輸出的手動,半自動和自動去顫器。

- ●雙相能量測量
- ●操作簡單
- ●相容所有AED監視除顫器波形的顯示
- 所有參數選項為下拉選擇屏幕
- 12通道EKG模擬
- 容量: 5000 V·1000焦耳
- ●復律延遲測量
- 26個可選內部負載
- ●完整的脈搏分析
- ●需求靈敏度測試(pace maker mode)
- ●耐火期測試
- 50/60 Hz干擾測試信號
- ●心臟起搏器輸入的除顫器保護
- ●可儲存50個獨立測試序列/



# RADIOTEK 字宏企業股份有限公司

台北總公司:新北市三重區重新路五段609巷16號5樓之7(湯城) TEL:(02)2278-2269 新竹分公司: 新竹縣竹北市台元街26號4樓之10(台元科技園區) TEL:(03)552-6779

官網:www.radiotek.com.tw



# SECULIFE DF BASE



**Remote Control** 

### **Function Tester**

#### **BENEFITS:**

Defibrillator analyzer for performing function tests on external defibrillators.

The specified energy level is measured using an integrated load which simulates the human body (50  $\Omega$ ). Quick and direct observation and selection of the desired ECG waveforms and test data is also made possible.

A 12-channel ECG with arrhythmias and power waveforms is available for determining the current pulse. These can be recorded and viewed at the defibrillator's display. The **SECULIFE DF BASE** is fully AED compatible and is equipped with an auto-sequence function that can execute up to 50 test sequences which have been preprogrammed by the user. The tests are configured with easy-to-use software.

#### **FEATURES:**

- Monophasic, biphasic and biphasic pulsed energy measurement
- Cardioversion delay measurement
- Capacity: 5000 V, 1000 joule
- 10 universal patient cable connector sockets
- Flash programmable for upgrades

Туре	Article
SECULIFE DF BASE	M695Q

# SECULIFE DF PRO



**Remote Control** 

#### **Function Tester**

#### **BENEFITS:**

The **SECULIFE DF PRO** multimode defibrillator analyzer is an intelligent instrument for testing the latest generation of defibrillators. It measures discharged energy and provides information regarding the defibrillator pulse. The measured pulse can be graphically displayed as well. The tester is suitable for manual, semi-automatic and automatic defibrillators with **monophasic**, **biphasic and biphasic pulsed waveform output**.

Furthermore, the **SECULIFE DF PRO** can also be used for testing transcutaneous cardiac pacemakers.

The **SECULIFE DF PRO** makes it possible to quickly and directly observe and select the desired waveforms and test data. All operating information can be viewed at the graphics-compatible display (240 x 64 pixels), which makes it easy to navigate through the parameters and to scroll through all available options.


### **FEATURES:**

- Test for shock algorithms
- Fully AED compatible
- Cardioversion delay measurement (PRO)
- 26 selectable internal loads (PRO)
- Complete pulse analysis (PRO)
- Power demand sensitivity test (PRO)
- Refractory period tests (PRO)
- Defibrillator protection for pacemaker input (PRO)

Туре	Article
SECULIFE DF PRO	M695R

# SECULIFE VL



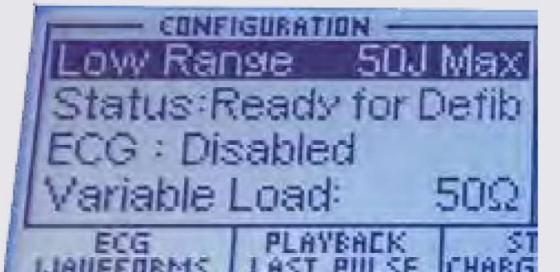

## **Variable Load**

## **BENEFITS**:

The **SECULIFE VL** makes it possible to adjust the variable loads of the **SECULIFE DF BASE / PRO** from 25 to 200  $\Omega$  and back down again in 25  $\Omega$  steps by simply turning a knob.

Connection via the RS 232 port permits automatic detection of the selected external load.

Туре	Article
SECULIFE VL	M695V



# 宇宏企業股份有限公司

台北:三重區重新路五段 609巷 16號 5樓之7 TEL:02-22782269 FAX:02-22782059 新竹:新竹縣竹北市台元 26號 4樓之 10 TEL:03-552-6779 FAX:03-552-6739

http://www.radiotek.com.tw/ E-mail: salesmag1@radiotek.com.tw